


INSTALLATION INSTRUCTIONS

N1EUxxx(A/G/D/S)* PRESSURE SENDER

INSTALLATION

MOUNT UNIT TO ENGINE WITH 1/8" NPT NIPPLE OR MOUNT ON BULKHEAD, PREFERRED, AND RUN A CONNECTING HOSE TO UNIT. THE UNIT IS RATED TO 120°C SO CARE SHOULD BE TAKEN TO KEEP UNIT AWAY FROM HIGH HEAT SOURCES.

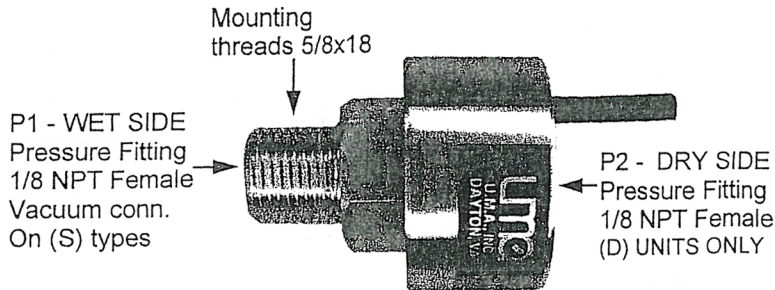

*TYPE G UNITS ARE GAUGE READING
 TYPE D UNITS ARE DIFFERENTIAL
 TYPE A UNITS ABSOLUTE
 TYPE S UNITS SUCTION GAUGE

WIRING

USE #24 OR #22 SHIELDED WIRE. USE TEFLON INSULATED TYPE IF Routed IN AREAS OVER 100°C

RED — +12VDC FROM INDICATING UNIT, REGULATED

BLACK — GROUND

WHITE — SIGNAL TO INDICATING UNIT

SHIELD—CONNECT TO GROUND AT INDICATING UNIT.

CONNECTION DIAGRAM

