Sealed Aircraft Battery, VRLA, LT Technology, 24V, 44Ah

5



INNOVATION

AIRCRAFT BATTERY

SPECIFICATIONS

Model			7638-44T
Nominal Voltage, V			24
One Hour Capacity, C1, Ah			44
30 Minute Emergency Rate, C/2, A			70
Weight, Lb. ±3%			86
Power Performance	23°C (75°F)	-18°C (0°F)	-30°C (-22°F)
lpp, A	1857	1677	1411
Ipr, A	1247	1051	948




Upgrade to the Next Generation of Lead-Acid Technology!

TSO Authorized DO-160E Tested Sealed, VRLA, Non-Spillable
 18 Month/1800 Hour Capacity Check Inspection Temperature Sensor Connector
 STC Kits included for New Installations 2 Year Warranty FAA-PMA EASA





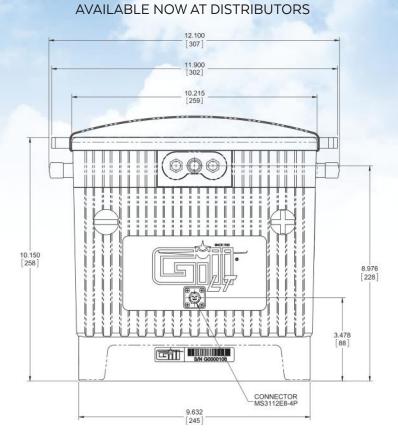

7638-44T

INNOVATION

FAA-PMA APPROVED MAKE | MODEL

 Citation
 525, 525A, 525B, 525C, 500,

 501, 550, 551, S550, 560,
 560XL, 650, 680

