



UAV

T2000UAV-L TRANSPONDER

BE SEEN BY
AIR TRAFFIC CONTROL / RADAR / TCAS

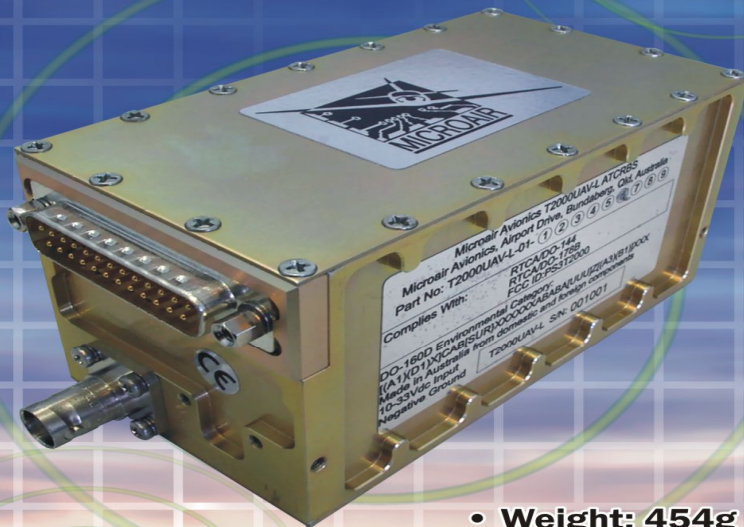

- **Weight: 454g (16oz)**
- **Mode 3A/C**
- **Low power**
- **200w pulse output**



www.microair.com.au

Airport Drive, Bundaberg
QLD 4670 AUSTRALIA
Ph +61 7 4155 3048
Fax +61 7 4155 3049
sales@microair.com.au

RTCA Compliance

**DO-144
DO-160D
DO-178B Level C**

Transmitter

**1090MHz +/-0.2MHz
200W Pulse Output
80nS Rise Time
120nS Fall Time**

Receiver

**+10 to -72dBm Dynamic Range
1030MHz Centre Frequency
+/-5MHz Pass band @ -3dB**

Input Power

**10-33Vdc
100-150mA @ 28V
150-200mA @ 14V**

Operational Modes

**Standby
Mode 3A (4096 codes)
Mode 3A/C**

Temperature

-20° C to +55° C

Dimensions

**Width 61mm
Height 61mm
Length 134mm**

Weight

454g (16oz)

